




## Dimensions

Unit: Inch (mm)

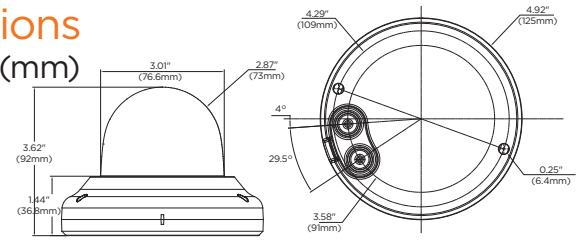

## Summary

This NDAA- and TAA-compliant MEGAPIX Ai™ IP camera provides 4K resolution at real-time 30fps with an Ai edge engine onboard. MEGAPIX Ai cameras place the power of AI at your fingertips, with people and object detection, classification, and tracking. This camera features Star-Light Plus™ color in near- total darkness technology and true WDR for quality video in any lighting condition, and a 2.7-13.5mm vari-focal auto-focus lens for clarity and convenience. All MEGAPIX cameras are ONVIF conformant, assuring their successful integration with any open platform solution on the market.


## Features

- 4K 1/2.8" image sensor at real-time 30fps
- Star-Light Plus color in near-total darkness technology
- AI-based object and people detection, classification and tracking
- Create up to 40 detection zones in the same camera
- Easy setup with no analytics calibration
- Seamless integration and control with DW Spectrum® IPVMS
- Reduce false alarms
- Increase your recording storage with logic rules and smart recording
- 2.7-13.5mm vari-focal p-iris lens with motorized zoom and auto-focus
- True Wide Dynamic Range (WDR)
- Triple codecs (H.265, H.264, MJPEG) with simultaneous streaming
- 100' Smart IR with intelligent camera sync
- Smart DNR 3D digital noise reduction
- True day/night with mechanical IR cut filter
- Programmable privacy zones
- Auto gain control (AGC)
- Auto white balance (AWB)
- Motion detection
- Two-way audio with built-in microphone
- Micro SD/SDHC/SDXC class 10 card slot (card not included)
- Alarm sensor input
- Relay output
- Web server built-in
- PoE Class 3 and DC12V
- UL-listed
- NDAA/TAA compliant
- IP67 dust-tight and waterproof to 3 feet
- IK 10-rated impact-resistant
- 5 year warranty

## Specifications

<b>IMAGE</b>	
Image sensor	4K 1/2.8" CMOS sensor
Total pixels	3864(H) X 2228(V)
Active pixels	3840(H) x 2160(V)
Minimum scene illumination	0.09 lux (color)
S/N ratio	50dB
Test monitor video output	Local video output CVBS 1.0V p-p (75Ω), 4:3 aspect ratio
<b>LENS</b>	
Focal length	2.7-13.5mm, F1.4
Lens type	Vari-focal p-iris lens with motorized zoom and auto-focus
Horizontal Field of view (HFOV)	33.1°-90.3°
Vertical Field of view (VFOV)	18.9°-49°
IR distance	100ft range
Optical zoom / digital zoom	5x optical zoom
<b>I/O</b>	
Audio input/output	1 microphone built-in/1 output
Audio compression	G.711
Alarm input/output	1 input/1 output
Event trigger	Motion alarm, network loss, temperature anomaly, illegal login, schedule, sensor detection
<b>INTELLIGENT VIDEO ANALYTICS</b>	
AI-based video analytics	AI-based object and people detection, classification and tracking
Analytics filters	Zones and lines, tamper, metadata, intrusion, line crossing, counting, counting lines, appear, disappear, stopped, enter, exit, direction, tailgating, dwell, logical rules
<b>OPERATIONAL</b>	
Shutter mode	Auto, manual, anti-flicker, slow shutter
Shutter speed	1/15 - 1/32000
Slow shutter	1/2, 1/3, 1/5, 1/6, 1/7.5, 1/10
Auto gain control	Auto
Day and night	TDN, Auto, day (color), night (B/W)
Digital Noise Reduction (DNR)	Smart DNR™ 3D DNR
Wide Dynamic Range (WDR)	True WDR
Wide Dynamic Range (WDR) dB	120dB
White balance	Yes
Privacy zones	16 programmable privacy masks
Mirror and flip	Yes
Alarm notifications	Notifications via email, FTP, alarm output and SD card recording
Memory slot	Micro SD/SDHC/SDXC class 10 card (not included)
<b>NETWORK</b>	
LAN	1000Base-T (1Gbps)
Video compression type	H.265, H.264, MJPEG H.265: 3840x2160, 2592x1944, 2560x1440, 1920x1080, 1280x720, 640x480, 640x360, 352x288, 352x240 H.264: 3840x2160, 2592x1944, 2560x1440, 1920x1080, 1280x720, 640x480, 640x360, 352x288, 352x240 MJPEG: 1920x1080, 1280x720, 800x600, 768x432, 704x576, 704x480, 640x480, 640x360, 352x288, 352x240
Resolution	3840x2160, 2592x1944, 2560x1440, 1920x1080, 1280x720, 640x480, 640x360, 352x288, 352x240
Frame rate	Up to 30fps at all resolutions
Video bitrate	100Kbps - 25Mbps
Bitrate control	Multi-streaming CBR/VBR at H.265 (controllable frame rate and bandwidth)
Streaming capability	dual-stream at different rates and resolutions
IP	IPv4
Protocol	TCP/IP, UDP, AutoIP, RTP (UDP/TCP), RTSP, NTP, HTTP, HTTPS, SSL, DNS, DDNS, DHCP, FTP, SMTP, ICMP, SNMPv1/v2/v3 (MIB-2), ONVIF
Security	HTTPS (TLS), IP filtering, 802.1x, digest authentication
SIP/VoIP support	SIP VoIP
ONVIF conformance	Yes
Web viewer	OS: Windows, Mac OS, Linux Browser: Internet Explorer, Google Chrome, Mozilla Firefox, Safari
Video management software	DW Spectrum
<b>ENVIRONMENTAL</b>	
Operating temperature	-4°F - 122°F (-20°C - 50°C)
Operating humidity	10-90% RH, (non-condensing)
IK rating	IK10 impact-resistant
IP rating	IP67-rated
Other certifications	CE, FCC, RoHS, UL, NDAA, TAA
<b>ELECTRICAL</b>	
Power requirement	DC12V, PoE IEEE 802.3af Class3 (Adapter not included)
Power consumption	DC12V: 10.2W, 850mA, PoE: 12.5W
<b>MECHANICAL</b>	
Material	Aluminum die-casting vandal housing, polycarbonate dome
Dimensions	4.92" x 3.62" (125 x 92mm)
Weight	1.14 lbs (0.52 kg)
Warranty	5 year warranty

## Accessories (Optional)

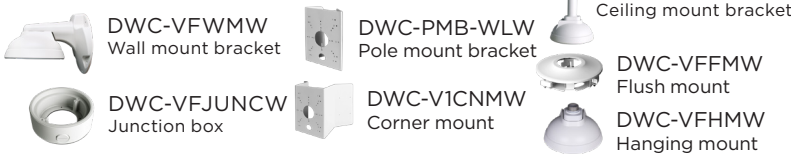

Built for Users.™

